
IMPORTANT: The "User Operating Card" must be left with Focus Articulated Arm once installed.



Installation Instructions

VF-AT-AA Focus Accessory Arm

Component Checklist

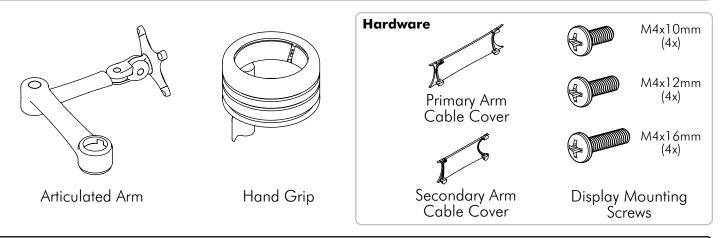

IMPORTANT INFORMATION:


- ! IMPORTANT Install Focus Accessory Arm as per Installation Instructions.
- ! This product is designed to be installed onto an existing Focus pole mount.
 - This products supports displays with a maximum weight of 8kg (17½ lbs), and VESA mounting hole configurations:
- 75 x 75mm (3" x 3"), 100 x 100mm (4" x 4").
- The manufacturer accepts no responsibility for incorrect installation.

Step 1. Check Components


L

Check you have received all parts against the Component Checklist and Hardware above.


Step 2. Remove Top Cap

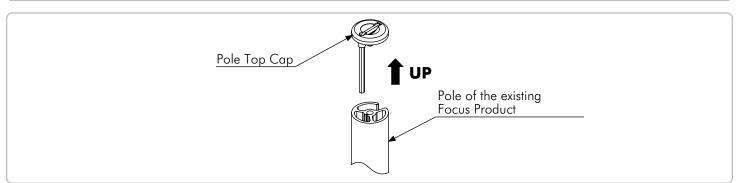


Step 3. Attached Articulated Arm to the Existing Focus Product

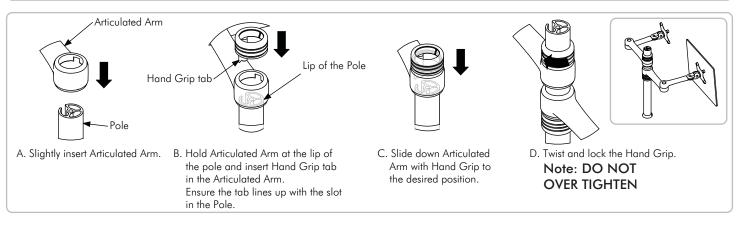


Step 4. Fasten Display to Articulated Arm

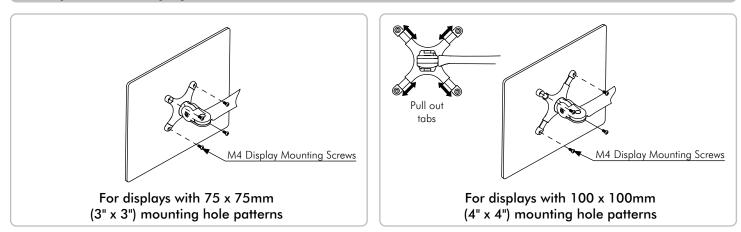

Step 5. Replace Top Cap

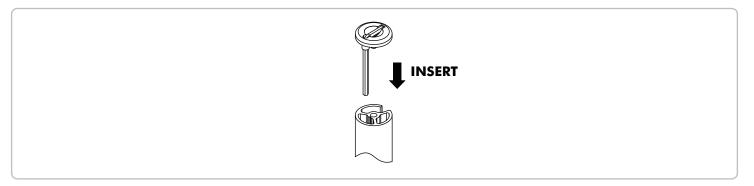

Step 6. Cable Management - Ensure arm is fully extended

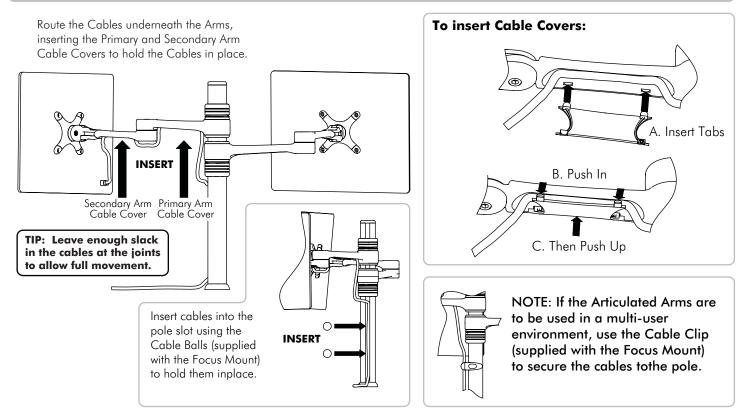

Installation Complete

No portion of this document or any artwork contained herein should be reproduced in any way without the express written consent Atdec Pty Ltd. Due to continuing product development, the manufacturer reserves the right to alter specifications without noticed. Published 06.09.12